

## Weatherproof Louvre

### Description

Suitable for both intake and return air applications. The Louvre blades offer a double weather stop design making it a unique and efficient solution in providing weather protection. Wide blade spacings enable improved airflow with reduced pressure drops and noise levels. The custom manufactured range offers a 25mm flange and blades set at 68mm centres. Also available with a 40mm flange.

### Construction


From high quality extruded aluminium sections. Hairline mitres are mechanically held for maximum strength and durability. Finished in natural anodised aluminium as standard with optional powder coated colours and finishes available on request. Available in removable core screw fixed through face. Free areas range between 40% and 63%.

### Selection Data:

NC levels and pressure drops are given for louvres mounted in a sidewall at least 1200 mm up from the floor level. Results were obtained at Isothermal conditions. For other performance or selection details please contact the supplier.



### Weatherproof Louvre

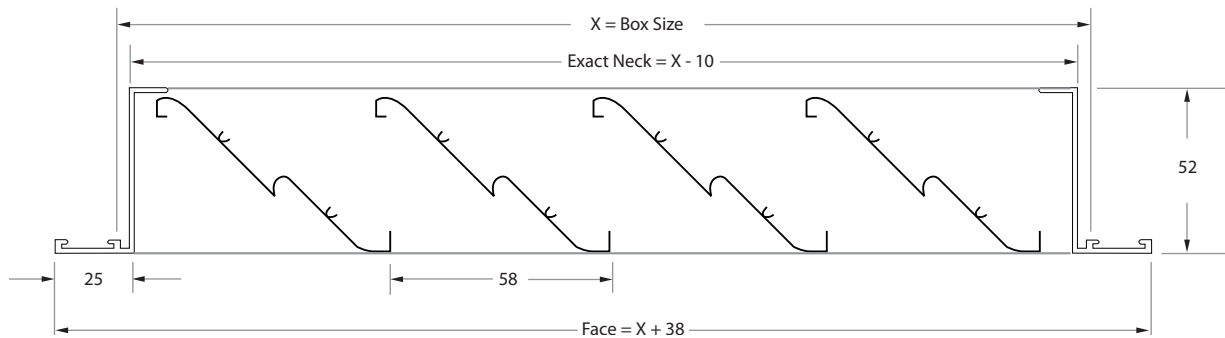

### Removable Core Weatherproof Louvre

