

Half Chevron

Description

For exhaust or return air, having a single set of fixed blades at 45 deg. at 17.5mm spacing. Available as either fixed, removable core or hinged. Quick release removable core and hinged models provide easy access to rear and concealed fixing facility and are available with or without filter. Suitable for wall mounting.

Construction


From high quality aluminium extrusion in a variety of custom sizes. Blades are secured at a standard pitch of 17.5mm and at 45 deg. Finished in natural anodised aluminium as standard with optional powder coated colours and finishes available on request.

Selection Data


Throw values are based on grilles installed in the sidewall not more than 600mm below a flat ceiling. Terminal velocities are based on 0.25m/s. NC levels and pressure drops are given for grilles with no filters or dampers attached. For other performance or selection details please contact the supplier.



Half Chevron

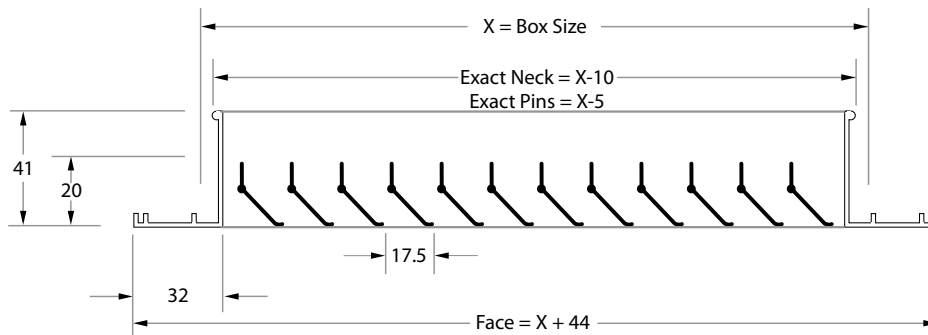

Removable Core Half Chevron

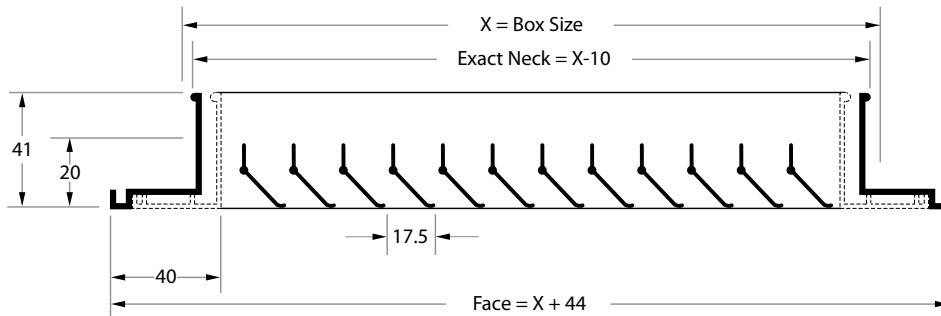

Hinged Half Chevron

